NOTES	UNLESS OTHERWISE SPECIFIED
1	GREEN WIRE IS SUPPLIED WITH A 5/16 INSULATED RING TERMINAL.
2	BLACK WIRE IS SUPPLIED WITH A #10 INSULATED RING TERMINAL.
3	POWER UNIT IS CHASSIS GROUNDED. MOUNTING SURFACE MUST BE CLEAN AND FREE OF PAINT.

CHANGE LETTER	C.O.	DESCRIPTION	DATE	BY

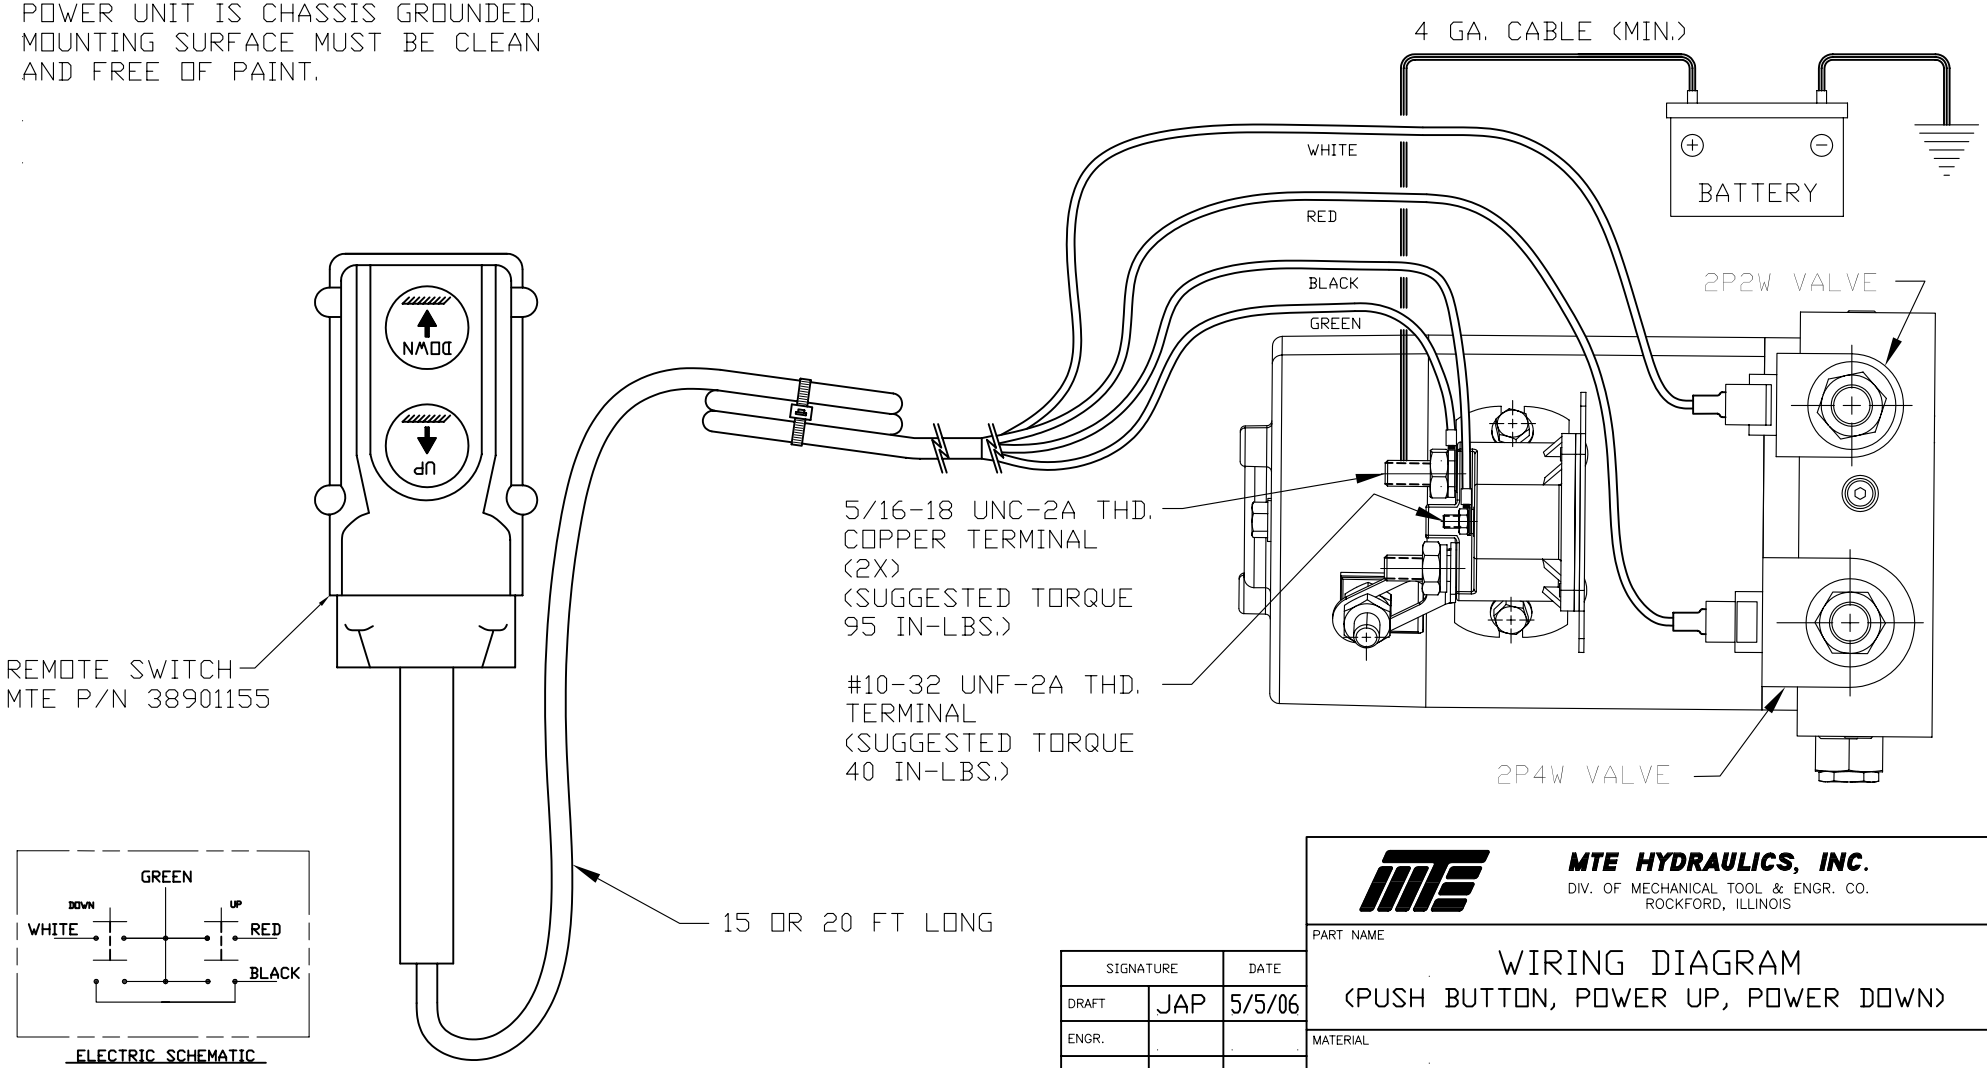

NOTICE – THIS PRINT CONTAINS PROPRIETARY INFORMATION AND IT IS FURNISHED SUBJECT TO THE EXPRESS CONDITION THAT IT WILL NOT BE USED IN ANY WAY DETRIMENTAL TO MTE HYDRAULICS INC.

SIGNATURE		DATE
DRAFT	JAP	5/5/06
ENGR.		
MFG.		
RELEASE	ECO	9443
SPEC. NO.	5014	

MTE HYDRAULICS, INC.
DIV. OF MECHANICAL TOOL & ENGR. CO.
ROCKFORD, ILLINOIS

PART NAME: WIRING DIAGRAM (PUSH BUTTON, POWER UP, POWER DOWN)

MATERIAL:

HEAT TREAT:

HARDNESS:

DATE: 5/5/06

DRAWING NUMBER: 39901194

REVISION:

SCALE: NONE